


Connection Guide: TP-Link AC750 (C24)

Step 1: Connection

- Use **Ethernet cable** to connect the **WAN port (blue port of Occom's router)** to the **LAN 1 port of fibre box**.



- Your modem/fibre box may look like this:

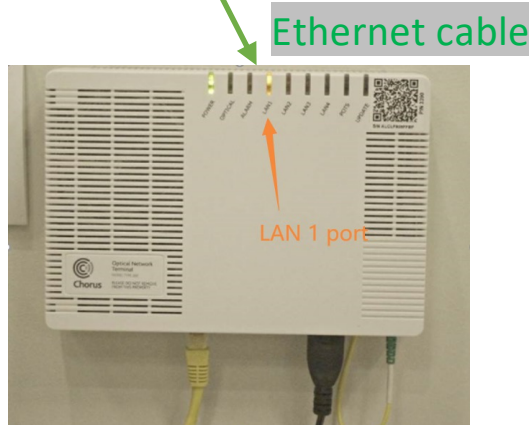


Step 2: Power on

- Using **power adaptor** to connect the power point to the socket.




- Plug in the power adapter in the **DC Plug** shown below:
- Note: Please **do not** press the small **RESET BUTTON** shown with **blue arrow**.

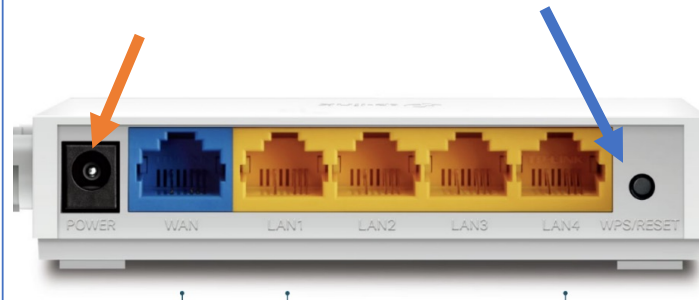

Step 3: Indicator lights

- After plugging in the power, the indicator lights will be:

Situation 1: If the **Internet LED light** is Solid green, means you can surf the Internet.

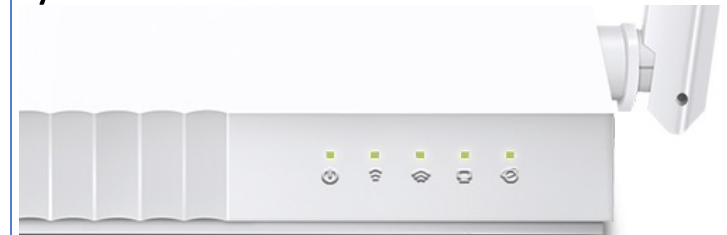


Situation 2:

>> Go to Step 4,
If the Internet light is **Orange**.

Connection Guide: TP-Link AC750(C24)


Step 4: Login Configuration Page

- Using **laptop /mobile device** connect to the router's Wi-Fi (you can inquire **Wi-Fi name (SSID)** and **password** from back of the router).

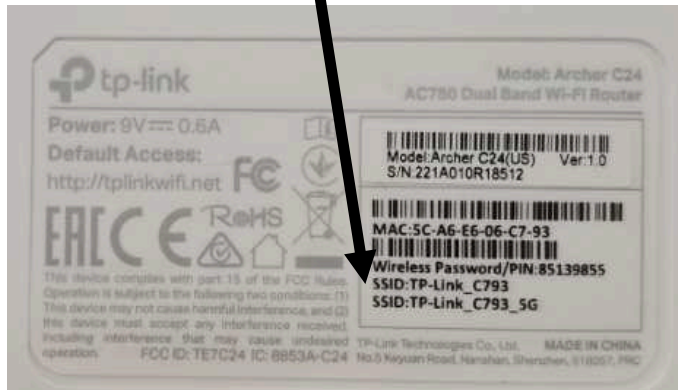


Step 5: Login Configuration Page


- Go to browser and browse to the website address:
<http://tplinkwifi.net/>

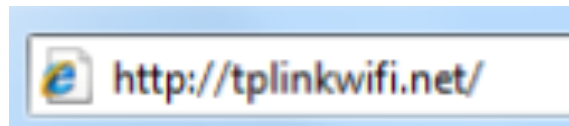

Step 6: Details

- The login details will be required to proceed further to configure.
- Username : **admin**
- Password: **admin**
- Both user and password is similar and all in lower case.

 admin




Log In

Connection Guide: TP-Link AC750 (C24)


Step 7: Details

- Once log in, then Click on **Network** > **WAN**.

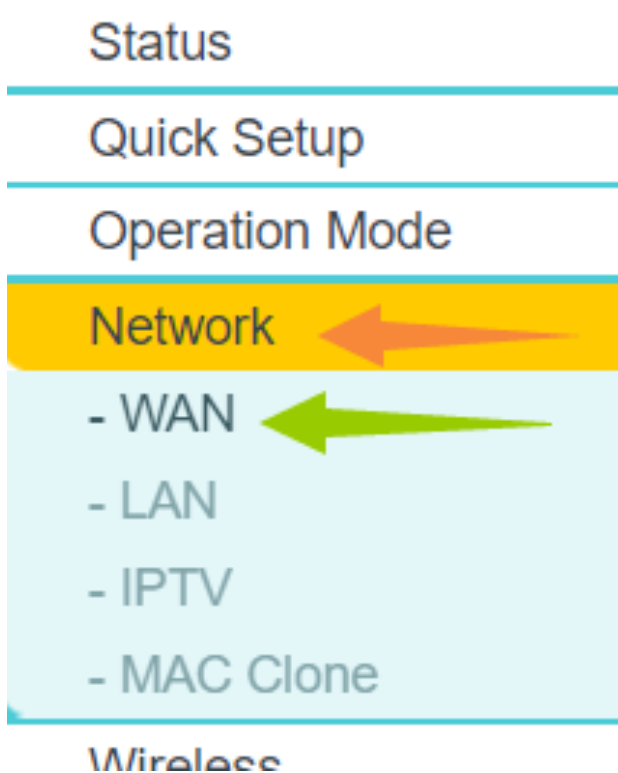


Step 8: Details

- 1. Click **Connection Type** to select **PPPoE**.
- 2. Fill the **PPPoE username** and **PPPoE password** and save the details given by the ISP.

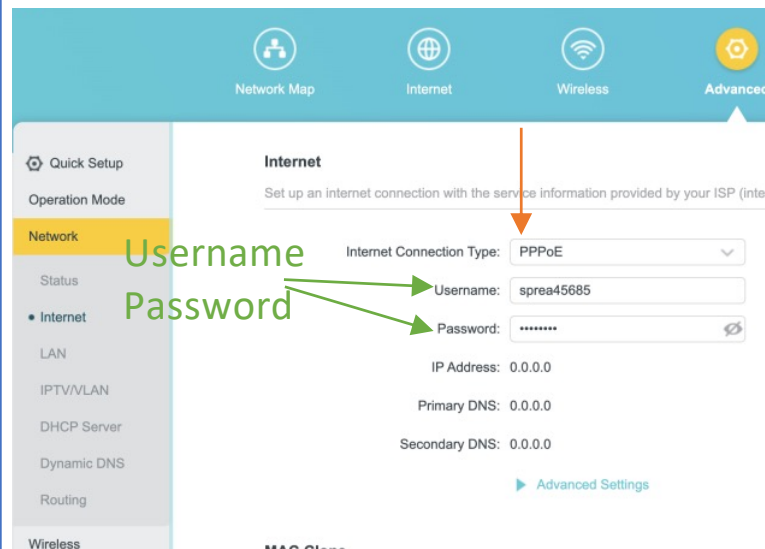

Step 9: Details

- Then click the **save** button at the bottom of the page.

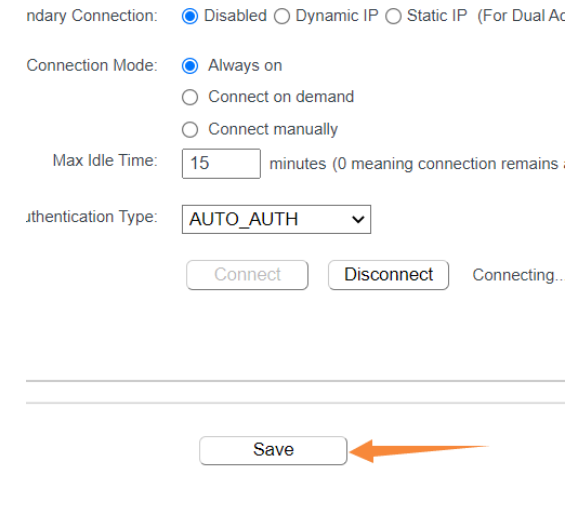

Connection Guide: TP-Link AC750 (C24)

Step 10: Details


- After that, let's back to the indicator lights on the router.



- The **Internet LED light** will also become **Green**, now you can surf the Internet.

Optional: Wi-Fi setting

- If you want to change your Wi-Fi name, you can:
- Click Advanced > **Wireless** > **Wireless settings**.
- Change **Network Name** to '**Occom_**' + '**the last four number of MAC address**' or any you want.

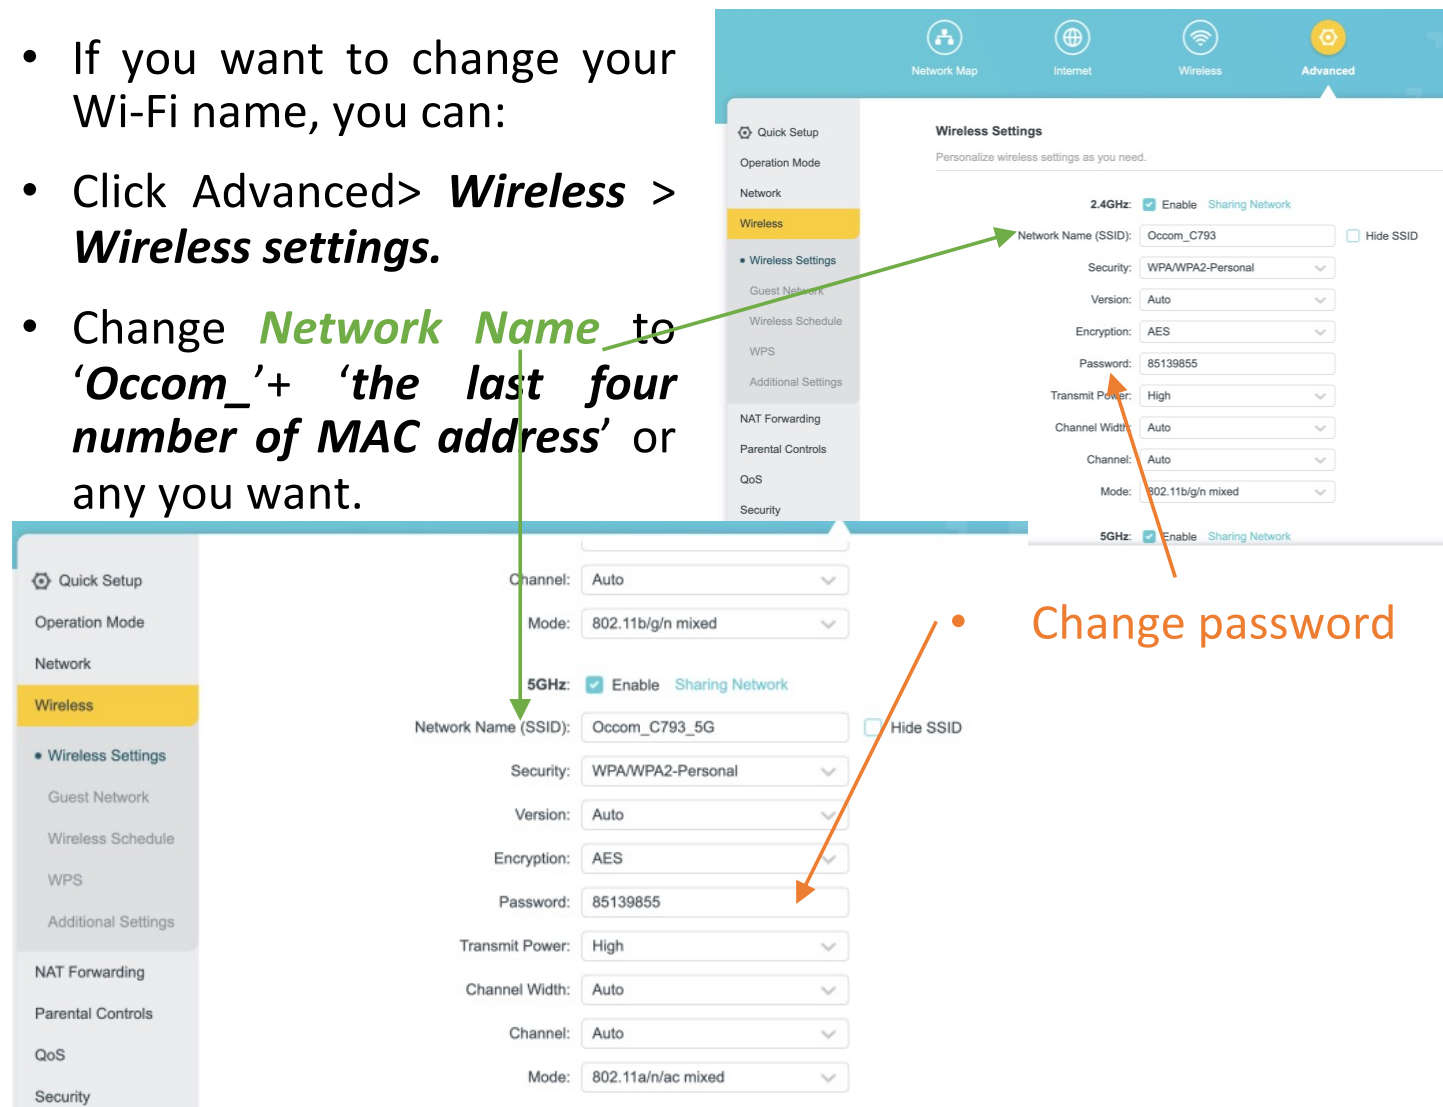

Wireless Settings

Personalize wireless settings as you need.

2.4GHz: ☒ Enable [Sharing Network](#)

Network Name (SSID): ☐ Hide SSID

Security:

Version:

Encryption:

Password:

Transmit Power:

Channel Width:

Channel:

Mode:

5GHz: ☒ Enable [Sharing Network](#)

Network Name (SSID): ☐ Hide SSID

Security:

Version:

Encryption:

Password:

Transmit Power:

Channel Width:

Channel:

Mode:

Change password