

TP-Link VR600 Setup Guide




Contents

1	Reset router	1
2	Setup router	1
	Ethernet cable connection	2
	WiFi connection.....	2
3	Login WIFI configuration page	3
4	Optional: Change your WiFi name and password/PIN.....	6

1 Reset router

- 1.1 Connect the router to power supply and turn on the router.
- 1.2 Press and hold this button for more than 10 seconds to reset the router to its factory default settings.

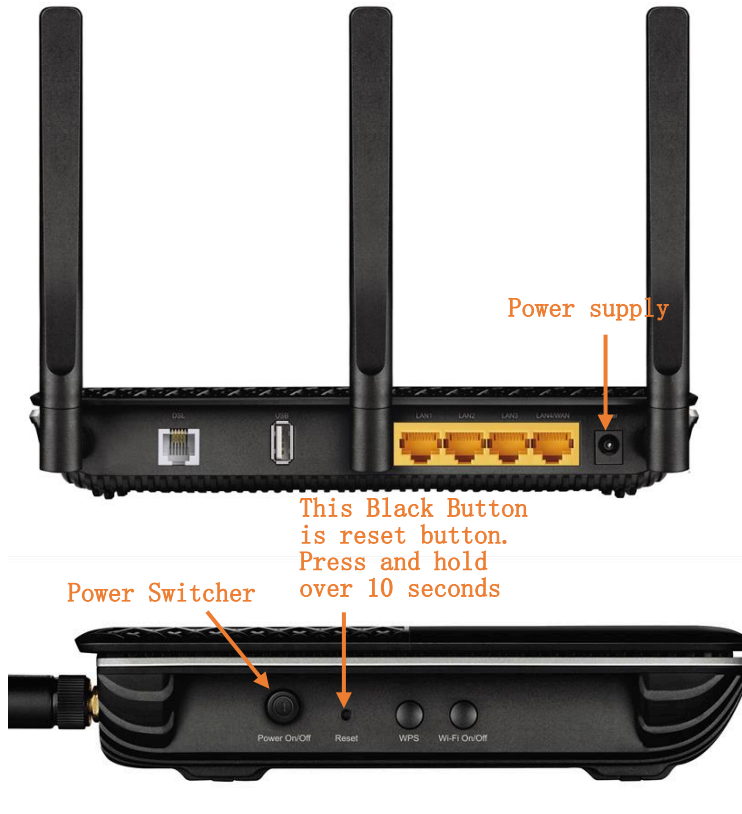

2 Setup router


- 2.1 Using an Ethernet cable to connect the DSL port.



2.2 There are two methods to connect with your router:

Ethernet cable connection

2.3 Turn off the WiFi on your laptop/PC and connect laptop/PC with any of LAN ports (1 –4 of router) via Ethernet cable.

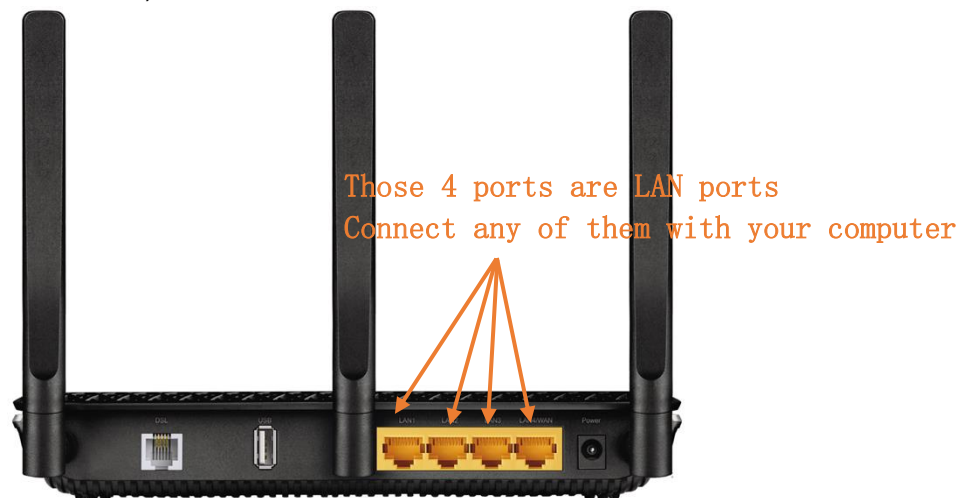

WiFi connection

You can use your laptop, tablet or phone to connect with router for setting through WiFi.

2.4 You can find the WiFi name and password/PIN at the back of router.




- 2.5 Click the network icon of your computer or go to Wi-Fi Settings of your smart device, and then select the SSID to join the network.

***Careful:** Once your device connect with haven't configured router, your device will temporarily out of Internet. So please do not use the device which is currently using Internet.

3 Login WIFI configuration page


- 3.1 Open Internet browser (e.g. Google Chrome, Safari, etc.) and input <http://192.168.1.1/> or <http://192.168.0.1/> in the address bar to visit router's configuration page. Firstly, setup a password for the configuration page.

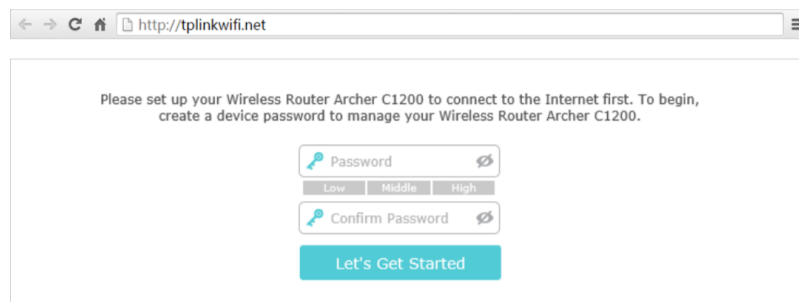


The screenshot shows the setup page for a TP-Link Archer C1200 router. The page instructs the user to set up the router to connect to the Internet. It features a 'Password' field with a strength indicator (Low, Middle, High) and a 'Confirm Password' field. A 'Let's Get Started' button is at the bottom.

*** Careful:** This is not the Password for your WiFi. This Password is only use for login configuration page, only the setup person know.

- 3.2 Click Advanced Button to view all setting.

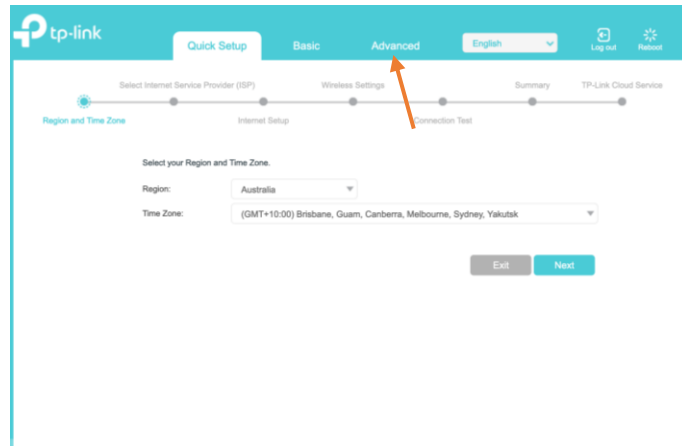

3.3 Click Network

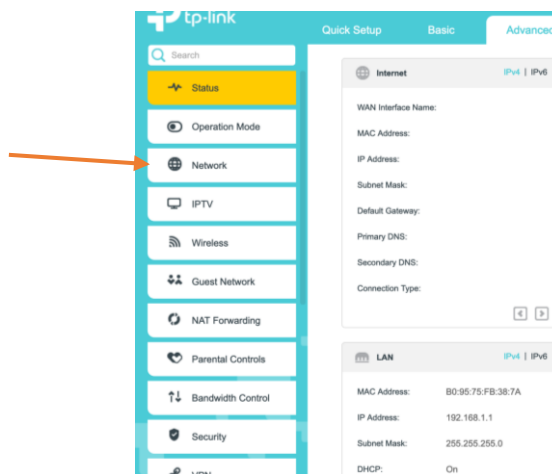

3.4 In the Internet page, you will see default setting. Delete them all.



3.5 After empty the page, Add a new one



3.6 Choose VDSL

Internet Connections

WAN Interface Name	VPI/VCI or VID	Status	Operation	Modify
--	--	--	--	--

Internet Connection Setup

DSL Modulation Type: ☒ VDSL ☐ ADSL

VLAN ID: ☐ Enable

Internet Connection Type: Static IP

IPv4: ☒ Enable

IP Address: 0 . 0 . 0 . 0

Subnet Mask: 0 . 0 . 0 . 0

Gateway: 0 . 0 . 0 . 0

Primary DNS: 0 . 0 . 0 . 0

Secondary DNS: 0 . 0 . 0 . 0 (Optional)

Default Gateway: Current Connection

IPv6: ☐ Enable

3.7 Change Internet Connection Type to PPPoE

Internet Connection Type: Static IP

IPv4:

IP Address:

Subnet Mask:

Gateway:

Static IP

Dynamic IP

PPPoE

Bridge

3.8 Input the PPPoE username and password provided by us, then click “Save”. You can find these username and password in the Service Activation Notice Email. (Ensure the Connection Mode is Always on and please save other as default.) Save the change.

Internet Connections

WAN Interface Name	VPI/VCI or VID	Status	Operation	Modify
--	--	--	--	--

Internet Connection Setup

DSL Modulation Type: ☒ VDSL ☐ ADSL

VLAN ID: ☐ Enable

Internet Connection Type: PPPoE

Username:

Password:

Confirm Password:

Connection Mode: ☒ Auto ☐ On Demand ☐ Manually

Authentication Type: Auto

IPv4: ☒ Enable

Default Gateway: Current Connection

IPv6: ☐ Enable


- 3.9 After a while, the third one on the right light of your router is solid green which means you can access the Internet now.



4 Optional: Change your WiFi name and password/PIN

4.1 Change WiFi name & Password:

Click Wireless -> Wireless Settings. You can enter your WiFi name in Network Name and Password in this page. Click "Save" bottom after changing.

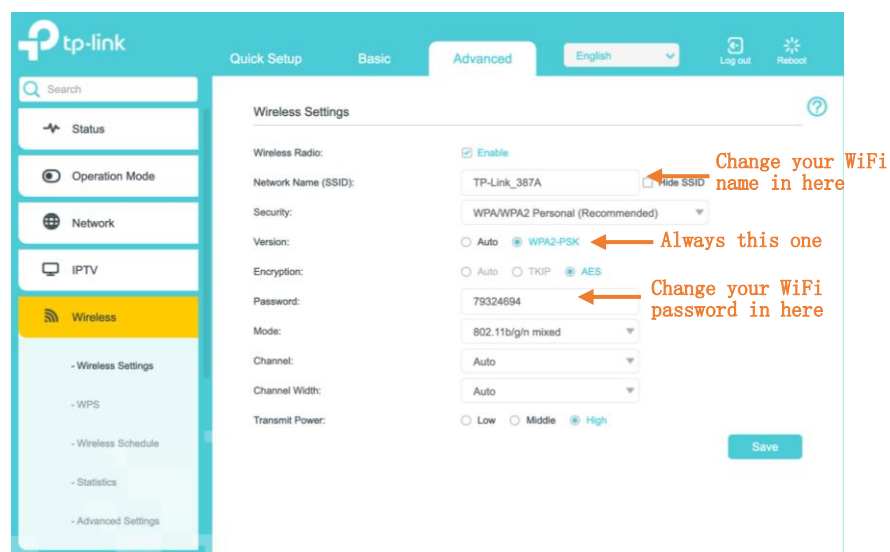

***Careful:** Once you change your WiFi name or password, your device needs to reconnect with WiFi.